



BOLLARDS.

**G:B:D:**  
CREATIVE AUTOMATIONS

DPT290K

230V \*PRODUCT ALSO AVAILABLE  
AT 115 VAC





BOLLARDS.

**G:B:D:**  
CREATIVE AUTOMATIONS

## DPT290K

**230V** \*PRODUCT ALSO AVAILABLE  
AT 115 VAC

Automatic rising bollards in 230Vac with hydraulic technology for specific use in perimeter security and controlled driveways.

### EASY TO INSTALL

The motorisation is always integrated and they are ready to be fit in their special foundation boxes.

### SILENT AND STRONG

Special high efficiency motor. Cylinder thickness from 10 mm, diameter 273 mm and cylinder height 900 mm. **Certificated (K4 – PA68:2013 e IWA 14-1:2013).**

### PERFORMING


For heavy use of 2000 movements and average lifetime (MCBF) of 3.000.000 movements.

### TECHNOLOGICAL AND SAFE

Pre-wired and provided with all possible optional, necessary for a safer installation.

### DESIGN

Smart, with led crown integrated, power painted and customizable on demand with every colour, or made in brushed stainless steel.

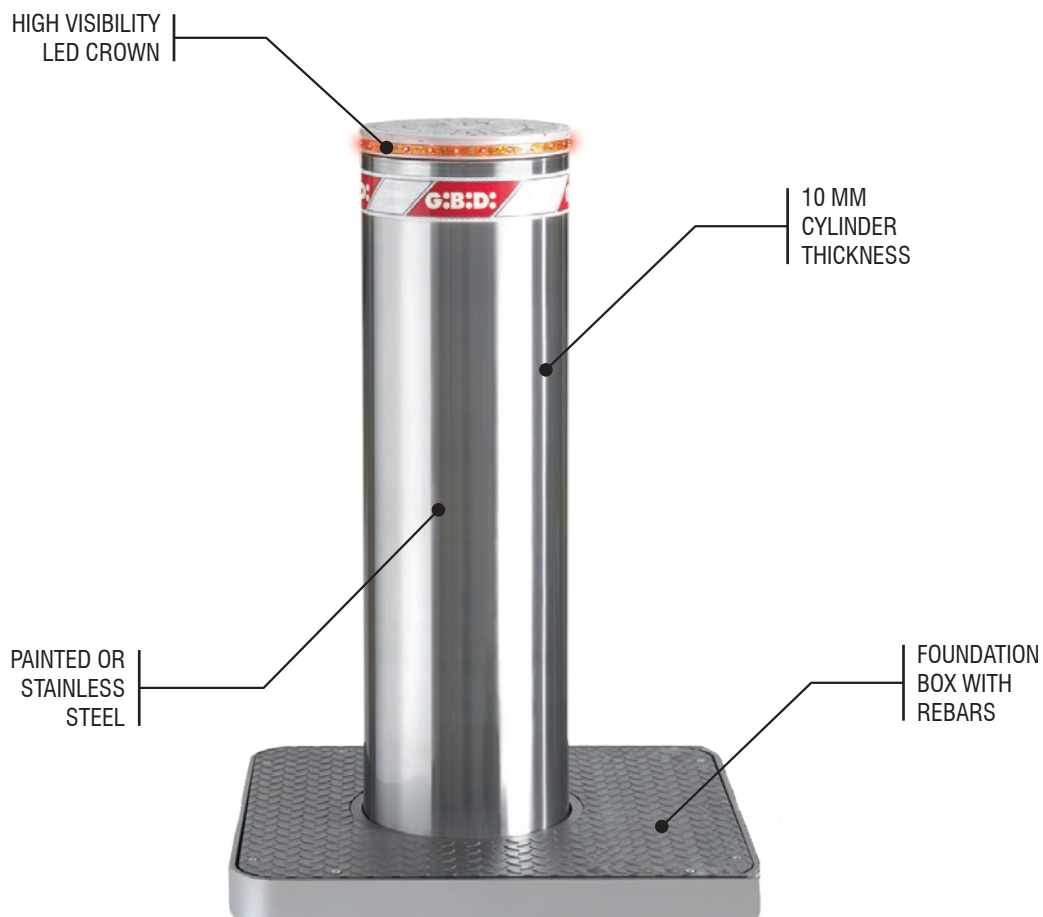

DOWNLOAD  
MORE CONTENT




BOLLARDS.

**G:B:D:**  
CREATIVE AUTOMATIONS

## TECHNICAL FEATURES

	<b>T290K</b>
Type of use	<b>HEAVY DUTY</b>
Frequency of use	<b>40%</b>
Motor power supply	<b>230Vac - 50/60Hz</b>
Absorbed power	<b>2,2 - 3,4 A</b>
Protection degree	<b>IP67</b>
Resistance to impact without deformation	<b>250.000 J</b>
Anti-breakthrough resistance	<b>750.000 J</b>
Opening/closing time	<b>2,43,6 - 6 s.</b>
Cylinder diameter	<b>273 mm</b>
Cylinder stroke	<b>900 mm</b>
Thickness of the cylinder	<b>10 mm</b>
Operating temperature	<b>-40°C +70°C</b>

## DIMENSIONS

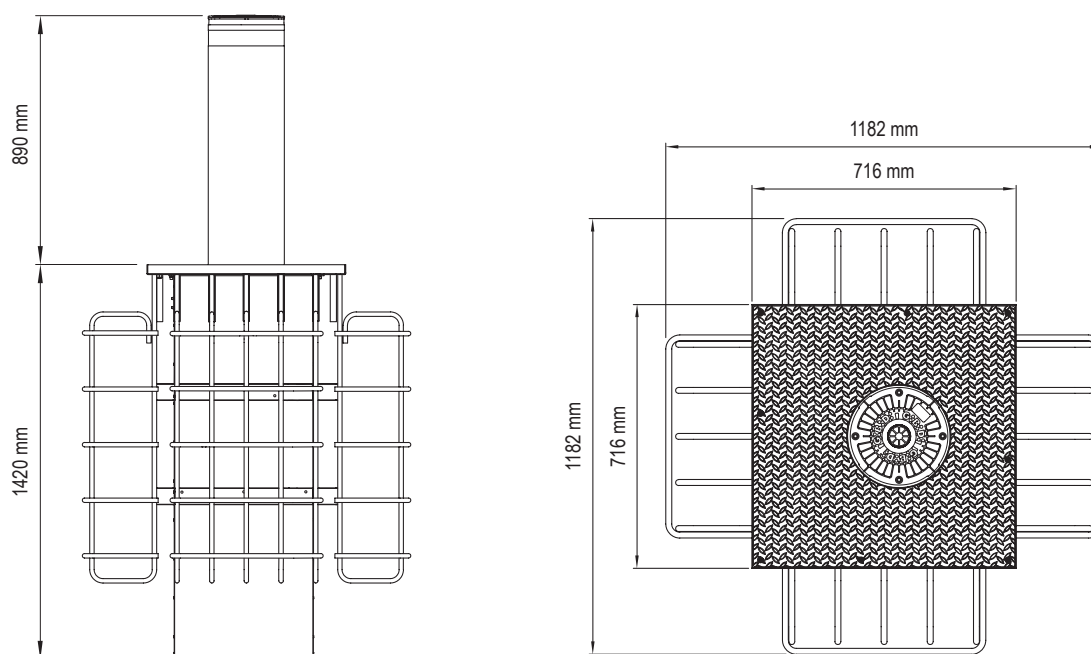

**G:B:D:**  
CREATIVE AUTOMATIONS



G.I.B.I.D.I. S.r.l.  
Via Abetone Brennero, 177/B  
46025 Poggio Rusco (MN) - ITALY  
Tel. +39.0386.52.20.11  
Fax +39.0386.52.20.31  
info@gibidi.com  
[www.gibidi.com](http://www.gibidi.com)