



SLIDING GATES SYSTEMS.

G:B:D
CREATIVE AUTOMATIONS

MINNOW

230V

*PRODUCT ALSO AVAILABLE
AT 115 VAC

UP TO 500KG



FOTO AUTOMATIC GATES





SLIDING GATES SYSTEMS.

G·B·D·
CREATIVE AUTOMATIONS

MINNOW

230V *PRODUCT ALSO AVAILABLE
AT 115 VAC

UP TO 500KG

Irreversible electromechanical gearmotor in 230Vac for sliding gates of medium size and weight (up to 500 Kg). For residential use.

EASY TO INSTALL

Control unit in a very good position for the installer.

SILENT AND STRONG

Made with metal gears. Painted aluminium body that makes it reliable over time.

PERFORMING

Small but strong. High precision gears guarantees noiseless movement and robustness.

TECHNOLOGICAL AND SAFE


Integrated control unit with built-in radio receiver. A very safe and user friendly system.

DESIGN

The most compact of its category.



POWERFUL
ELECTRIC MOTOR



SC130 CONTROL UNIT
WITH EMBEDDED
RADIO RECEIVER

PAINTED
MOTOR BODY



MANUAL RELEASE
DEVICE WITH
PERSONALISED KEY




DOWNLOAD
MORE CONTENT



TECHNICAL FEATURES

	MINNOW 500
Type of use	RESIDENTIAL
Frequency of use	40%
Motor power supply	230Vac - 50/60Hz
Absorbed power	250W
Protection degree	IP44
Gate speed	150 mm/s (9 m/min) - Z=16 M4
Max torque	12 Nm
Nominal torque	10 Nm
Adjustable torque	ELECTRONIC
Adjustable speed	NO
Max gate weight	500 Kg
Operating temperature	-20°C +60°C
Thermal switch	140°C
Type of lubrication	GREASE GBD PH-02
Weight of the unit	8,2 Kg

APPLICATION DIAGRAM

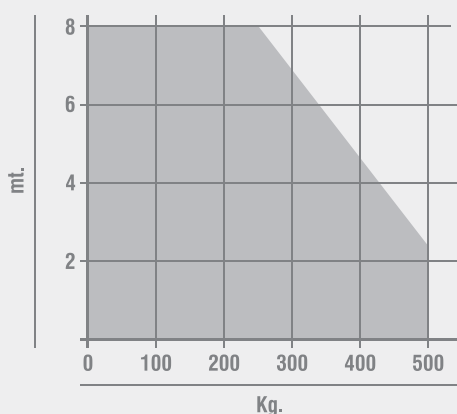

■ MINNOW 500

DIMENSIONS

