




ROLLING SHUTTER SYSTEMS.

**G:B:D:**  
CREATIVE AUTOMATIONS

MPS

230V

\*PRODUCT ALSO AVAILABLE  
AT 115 VAC

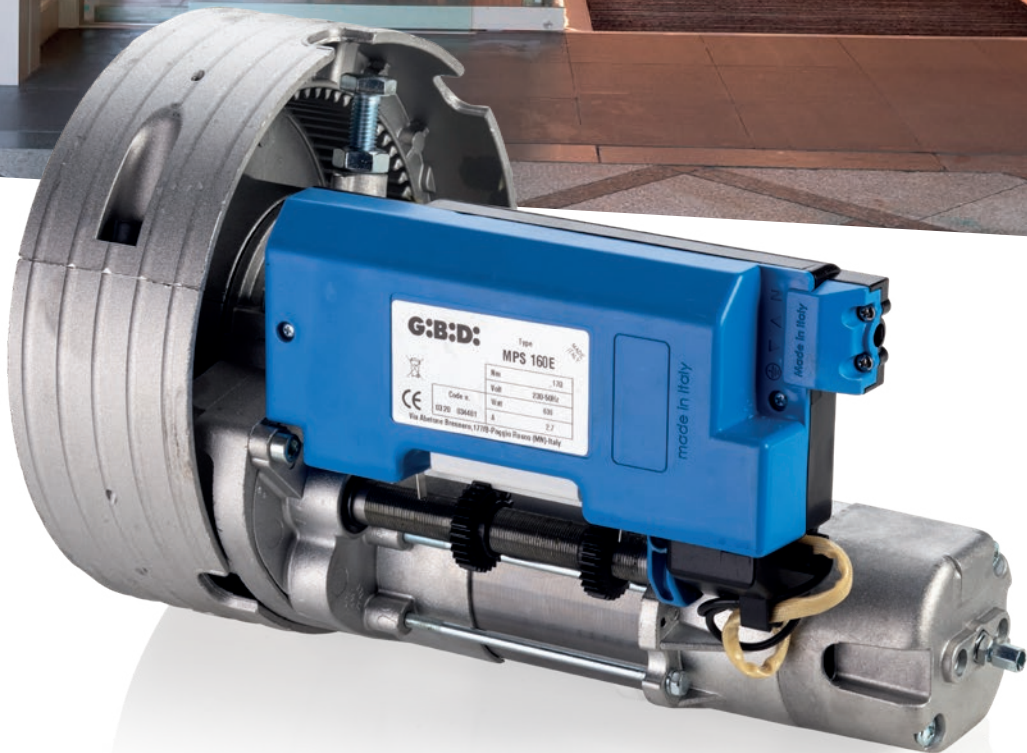



# ROLLING SHUTTER SYSTEMS.

## MPS

**230V** \*PRODUCT ALSO AVAILABLE AT 115 VAC

Central gearmotors for rolling shutters, for residential and commercial use.

### EASY TO INSTALL

Thanks to the assembling kit, adaptors and cable included.

### SILENT AND FAST

Exclusively made with high quality materials.

### TECHNOLOGICAL AND SAFE


Limit switch adjusting system constrained to the reduction gear for an accurate and lasting adjustment. Protected electrical connections.

### A COMPLETE AND RELIABLE RANGE

With or without electro-brake, single or bi-motor, a complete range for every kind of need.

ALUMINIUM  
STRUCTURE

STEEL  
GEARBOX

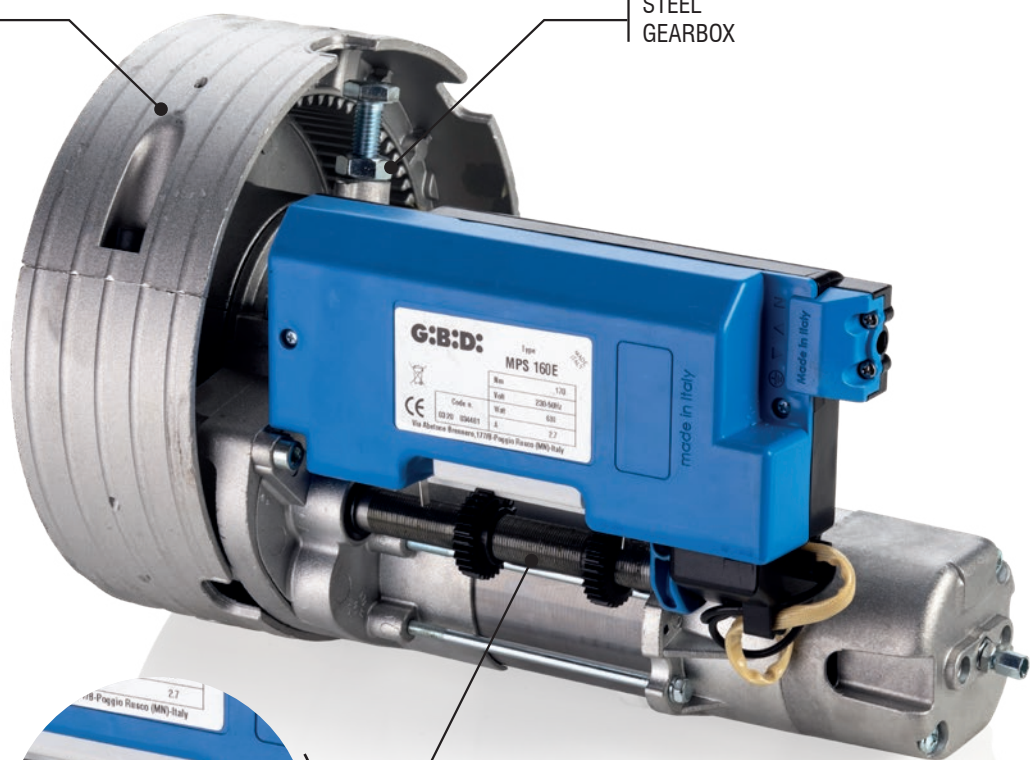

ADJUSTABLE EMBEDDED  
LIMIT SWITCHES



TWIN-ENGINE  
VERSION



DOWNLOAD  
MORE CONTENT




TECHNICAL FEATURES

	MPS 160 - 160E	MPS 160 BM - 160E BM	MPS 240 - 240E	MPS 240BM - 240E BM
Motor power supply	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz	230 Vac - 50/60 Hz
Absorbed power	630 W	1260 W	630 W	1260 W
Absorbed current	2,7 A	5,4 A	2,7 A	5,4 A
Max torque	170 Nm	280 Nm	210 Nm (200 Nm for the version E)	420 Nm (400 Nm for the version E)
Rpm	10	10	8	8
Limit switch range	6	5/6	5/6	5/6
Electro-brake	NO (YES for the version E)	NO (YES for the version E)	NO (YES for the version E)	YES
Pole diameter	200/220 mm	200/220 mm	240 mm	240 mm
Crown	60 mm	60 mm	76 mm	76 mm
Lifting power	170 Kg	280 Kg	180 Kg	360 Kg
Thermal cut out	4 min	4 min	4 min	4 min
Operator weight	7 Kg (8 Kg for the version E)	13 Kg (14 Kg for the version E)	9 Kg (10 Kg for the version E)	16 Kg (17 Kg for the version E)

DIMENSIONS

MPS 160

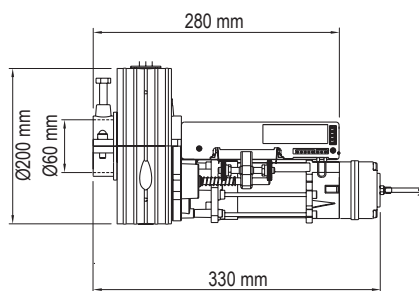

MPS 240

